

**AUTOTROL® 255/760 – 12L
RESIDENTIAL SOFTENER**



TESTED and CERTIFIED by the WQA to NFS/ANSI Standard 44 for Water Softener Performance.



TESTED and CERTIFIED by the WQA to NFS/ANSI Standard 61 Section 8 Material Safety Only.



TESTED and CERTIFIED by the WQA to NFS/ANSI Standard 372 for Lead Free Compliance.



Restriction of Hazardous Substance Compliant

Features

- Automatic water softener without external bypass valve
- No salt alarm
- Hard water mixing valve to adjust output hardness
- Built-in battery. 8 hours power back up
- Digital display
- Polyethylene compact cabinet with brine tank
- A microprocessor control monitors, measures and remembers your actual daily conditioned water usage
- Attractive, efficient and compact design
- The system regenerates automatically when necessary, based on your actual conditioned water needs
- Full auto (Volumetric Controlled and Time Controlled regeneration of the softener)
- Internal bypass automatically provides water during regeneration

Technical

- 10 x 17 composite pressure vessels PE liner reinforced with fiberglass and epoxy resin
- 12 Liters of food grade Ion exchange resin
- Inlet/Outlet diameter: 1"
- Operating pressure 2 to 7 bar. Pressure tested to 15 bar
- Electrical power supply 220V-12V (transformer included)
- Minimum flow rate: 1.74 m³
- Maximum flow rate: 2.3 m³
- Capacity: 68.75 m³/ 10ppm CaCO₃
- Salt consumption: 1.9 kg /regeneration @ 150gr NaCl / l resin
- 35 liters brine tank capacity

A.P.Laquaforce Services Ltd

Agathonos 9, Ypsonas – Limassol
T: 7777 2782 – F:+357 25755540

www.laquaforce.com – info@laquaforce.com


Valve Specifications

Valve Body Glass-filled thermoplastic (NSF Listed material)
 Rubber Components Compounded for cold water (NSF Listed material)
 Weight 4lbs (1.8 kg)
 Operating Pressure 20-120 psi (1.38-8.27 bar)
 Canada: 20-100 psi (1.38-6.89 bar)
 Hydrostatic Test Pressure 300 psi (20.69 bar)
 Water Temperature 35°-100°F (2°-38°C)
 Ambient Temperature* 35°-120°F (2°-48.9°C)
 *Recommend use of outdoor cover
 for direct sunlight applications

Electrical

Operating Voltage 12 volt– AC
 Input Supply Frequency 50 or 60 Hz
 Motor Input Voltage 12 volt– AC
 Controller System
 Power Consumption 3 watts average

Dimensions

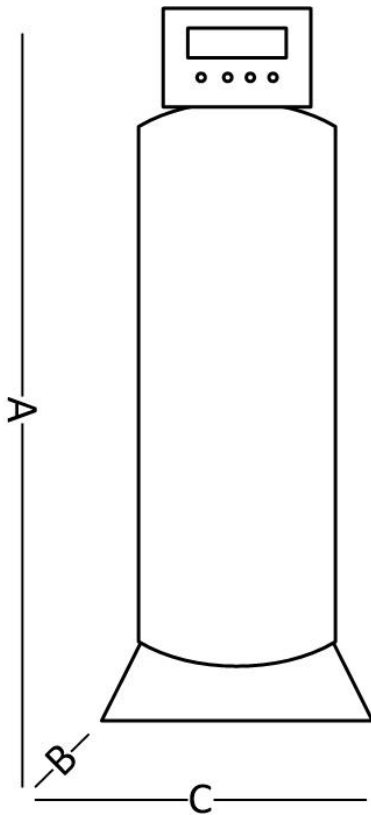

A(cm)	B(cm)	C(cm)	D(cm)	E(cm)	F(cm)
67	65	33	-	-	-

A.P.Laquaforce Services Ltd

Agathonos 9, Ypsonas – Limassol
 T: 7777 2782 – F:+357 25755540
www.laquaforce.com – info@laquaforce.com