

**AUTOTROL® 255/760 – 25L**  
RESIDENTIAL SOFTENER



TESTED and CERTIFIED by the WQA to NFS/ANSI Standard 44 for Water Softener Performance.



TESTED and CERTIFIED by the WQA to NFS/ANSI Standard 61 Section 8 Material Safety Only.



TESTED and CERTIFIED by the WQA to NFS/ANSI Standard 372 for Lead Free Compliance.



Restriction of Hazardous Substance Compliant

*Features*

- Automatic water softener without external bypass valve
- No salt alarm
- Hard water mixing valve to adjust output hardness
- Built-in battery. 8 hours power back up
- Digital display
- Polyethylene compact cabinet with brine tank
- A microprocessor control monitors, measures and remembers your actual daily conditioned water usage
- Attractive, efficient and compact design
- The system regenerates automatically when necessary, based on your actual conditioned water needs
- Full auto (Volumetric Controlled and Time Controlled regeneration of the softener)
- Internal bypass automatically provides water during regeneration

*Technical*

- 10 x 35 composite pressure vessels PE liner reinforced with fiberglass and epoxy resin
- 25 Liters of food grade Ion exchange resin
- Inlet/Outlet diameter: 1"
- Operating pressure 2 to 7 bar. Pressure tested to 15 bar
- Electrical power supply 220V-12V (transformer included)
- Minimum flow rate: 1.74 m<sup>3</sup>
- Maximum flow rate: 2.3 m<sup>3</sup>
- Capacity: 165 m<sup>3</sup>/ 10ppm CaCO<sub>3</sub>
- Salt consumption: 4.5 kg /regeneration @ 150gr NaCl / l resin
- 85 liters brine tank capacity

**A.P.Laquaforce Services Ltd**

Agathonos 9, Ypsonas – Limassol  
T: 7777 2782 – F:+357 25755540

www.laquaforce.com – info@laquaforce.com

### Valve Specifications


Valve Body Glass-filled thermoplastic (NSF Listed material)  
 Rubber Components Compounded for cold water (NSF Listed material)  
 Weight 4lbs (1.8 kg)  
 Operating Pressure 20-120 psi (1.38-8.27 bar)  
 Canada: 20-100 psi (1.38-6.89 bar)  
 Hydrostatic Test Pressure 300 psi (20.69 bar)  
 Water Temperature 35°-100°F (2°-38°C)  
 Ambient Temperature\* 35°-120°F (2°-48.9°C)

\*Recommend use of outdoor cover  
 for direct sunlight applications

### Electrical

Operating Voltage 12 volt– AC  
 Input Supply Frequency 50 or 60 Hz  
 Motor Input Voltage 12 volt– AC  
 Controller System  
 Power Consumption 3 watts average

### Dimensions

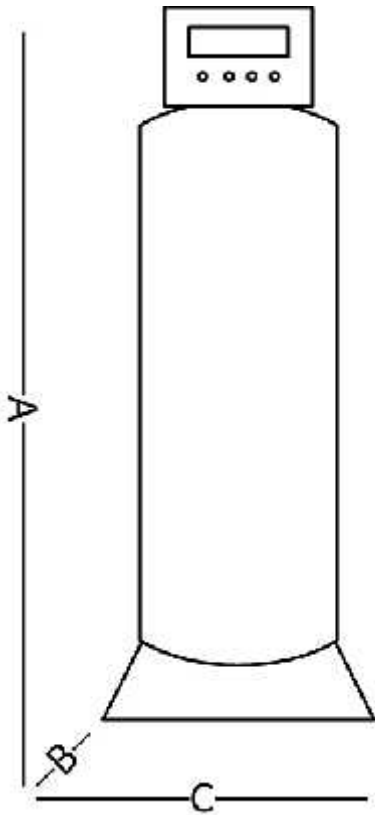

A(cm)	B(cm)	C(cm)	D(cm)	E(cm)	F(cm)
113	65	33	-	-	-

**A.P.Laquaforce Services Ltd**

Agathonos 9, Ypsonas – Limassol  
 T: 7777 2782 – F:+357 25755540

[www.laquaforce.com](http://www.laquaforce.com) – [info@laquaforce.com](mailto:info@laquaforce.com)